



Dual Setup Station

Setup station for increased productivity
of EOS metal systems

TECHNICAL DATA | DUAL SETUP STATION


Ergonomic setup and automatic storage, loading and unloading of exchange frames on an EOS M 400 / M 300-4 for consecutive, automatically started build jobs.

Compatible with: EOS M 400(-4), EOS M 300-4


The Dual Setup Station includes following features:

- » Fully automatic loading and unloading of the used EOS system due to an integrated conveyor system
- » Ergonomic unpacking and setup of the EOS system while the next build job is already running
- » Increased productivity and reduced downtime due to buffer position and handling of two exchange frames
- » Full accessibility to the EOS system for maintenance purposes
- » Control via touch panel (7") and pushbuttons inside the chamber for comfortable operation during unpacking and setup
- » Horizontal process and safety communication with EOS systems

Layout:

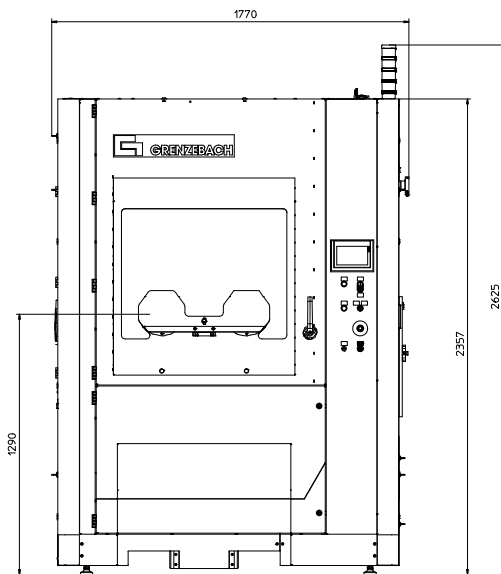

Front view

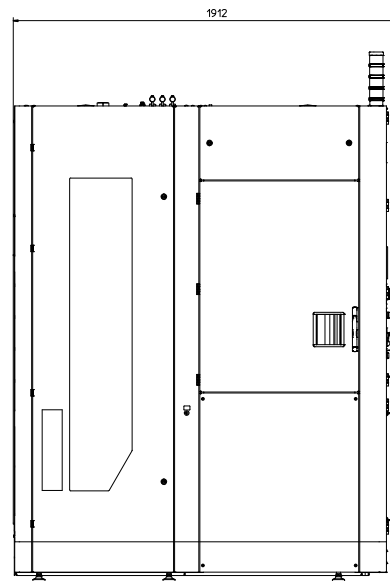

Side view

Dimensions:

Length	Approx. 1,912 mm
Width	Approx. 1,770 mm
Height	Approx. 2,357 mm
Operating height gloves	Approx. 1,290 mm

Grenzebach Maschinenbau GmbH
Albanusstraße 1
86663 Asbach-Bäumenheim Hamlar, Germany
Phone: +49 906 982-2000
E-mail: am@grenzebach.com

Version 01|2024