


## 振動チューブミル

Vibration tube mill



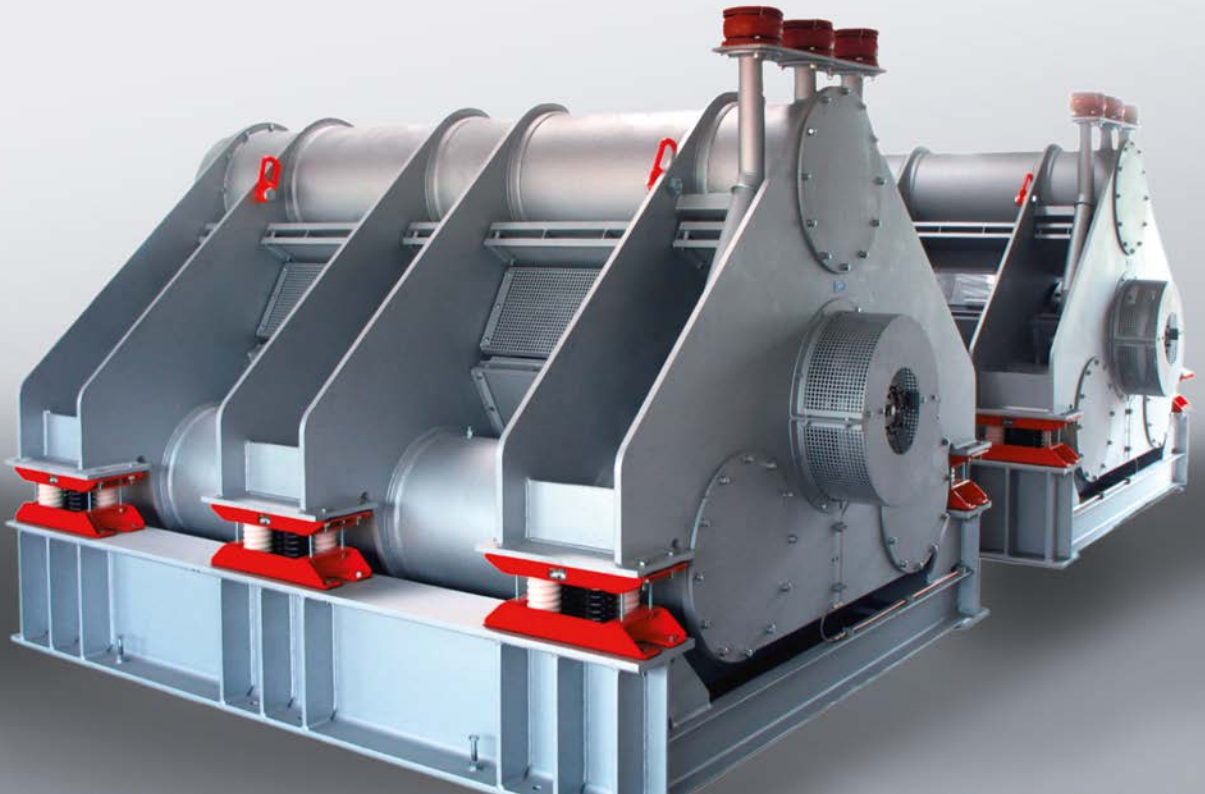

## 振動チューブミル

グレンツェバッハ社の振動チューブミルは、スラグ、灰、顔料、クリストパライト、チタンスラグ、ケイ砂などの中硬質～硬質の摩耗性原料の粉砕に使用されます。



- ✓ 供給原料によっては最大30t/hの処理能力を達成可能。
- ✓ 摩耗性原料を粉砕、350℃以下の高温原料を処理するため特殊材質を採用。
- ✓ 頑丈な設計と構造により、スペアパーツの必要性が少なく、装置寿命が長い。
- ✓ 原料によっては、10mm以下の粒度を最大d90=50μmまで粉砕することが可能
- ✓ 非鉄系原料の粉砕


## VIBRATION TUBE MILL

Grenzebach vibration tube mills are used for grinding of medium-hard to hard, abrasive products, such as slag, ash, pigments, cristobalite, Ti-slag, quartz sand, etc.

- ✓ Grenzebach vibration tube mills achieve throughput rates of up to 30 t/h, depending on the feed material
- ✓ Special materials allowing to mill and handle abrasive products and product temperatures of up to 350 °C
- ✓ Sturdy design and construction allowed very long service live and require only very few spare parts
- ✓ An end fineness of d90 = 50 μm can be achieved by feed particles < 10 mm depending on the product quality
- ✓ Non-ferrous milling

## フローチャート Flow chart

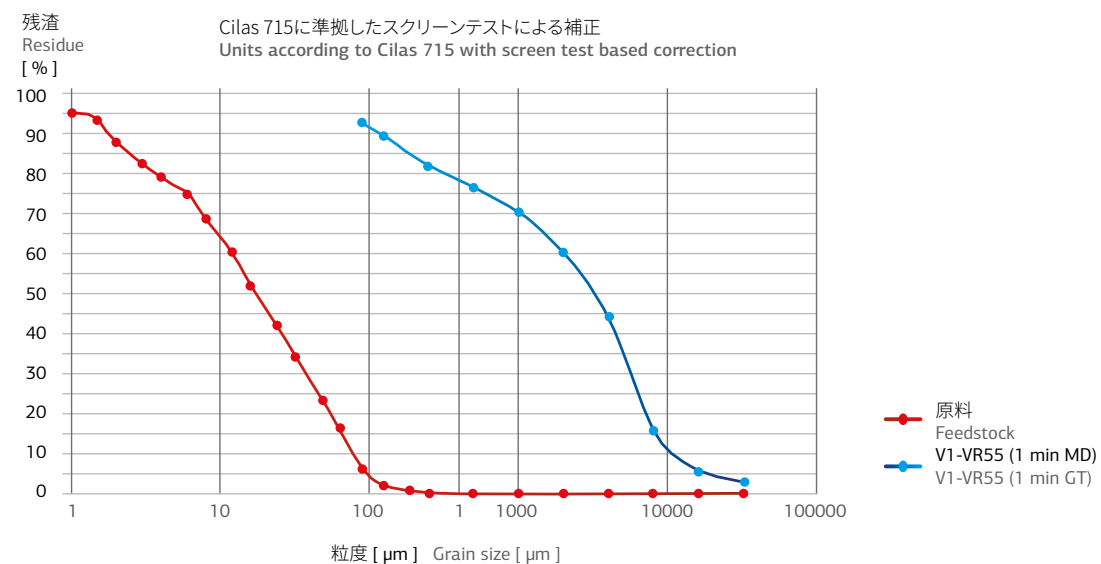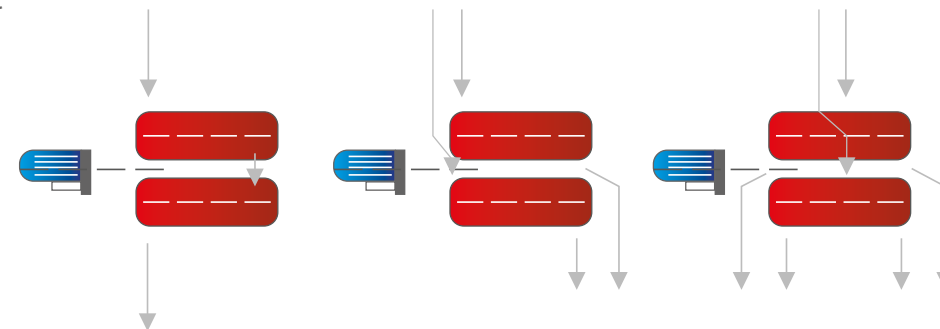

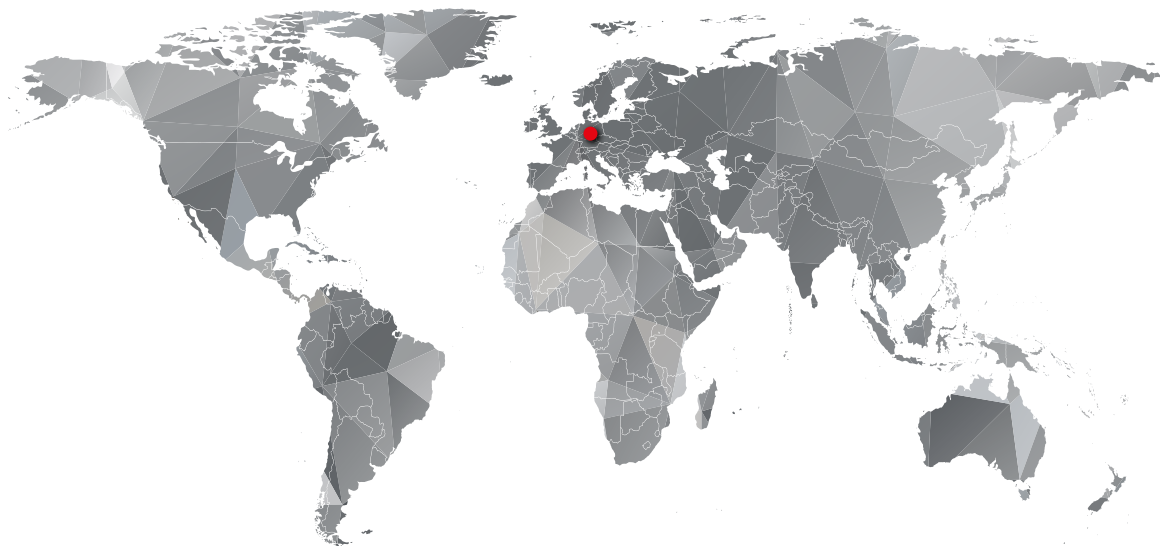

**Grenzebach BSH GmbH**

Rudolf-Grenzebach-Straße 1

36251 Bad Hersfeld

Germany

Phone: +49 6621 81 3000

E-mail: [process@grenzebach.com](mailto:process@grenzebach.com)

[www.grenzebach.com/process](http://www.grenzebach.com/process)

